

FREMONT



WELCOME TO THE WOOD-FIRED REVOLUTION.
WE WANT YOU TO GET THE MOST OUT OF YOUR TRAEGER.

Scan here to access this manual in different languages, as well as to learn how to set up, season, and get the most out of your grill.

IMPORTANT SAFETY PRECAUTIONS

READ ALL INSTRUCTIONS BEFORE INSTALLING AND USING YOUR TRAEGER® GRILL

A MAJOR CAUSE OF FIRES IS FAILURE TO MAINTAIN REQUIRED CLEARANCES (AIR SPACES) BETWEEN COMBUSTIBLE MATERIALS AND YOUR GRILL. IT IS OF UTMOST IMPORTANCE THAT THIS PRODUCT BE INSTALLED ONLY IN ACCORDANCE WITH THESE INSTRUCTIONS.

When properly operated and maintained, cooking with a hardwood fire on a Traeger® Grill brings years of enjoyment to you and your friends and family. Your new Traeger® Grill is specially designed to make cooking easier while giving you optimal performance with the most flavorful food.

Please read this entire manual before installation and operation. Anyone who uses this grill should also read the entire manual before operating it. Failure to follow these instructions could result in property damage, bodily injury, or even death. Contact local building or fire officials about restrictions and installation inspection requirements in your area. **Save these instructions.** If you are assembling this unit for someone else, provide this manual for the owner to read and save for future reference.


A DANGER Carbon Monoxide Hazard

Burning wood pellets produces carbon monoxide which may lead to illness, serious injury, and/or death. Follow these guidelines to prevent this colorless, odorless gas from poisoning you, your family, your pets, or others:

- Only use your Traeger® Grill outside in a wellventilated area. This grill is intended for OUTDOOR USE ONLY.
- Never use your Traeger® Grill in any enclosed area or any area without adequate ventilation.
- Know the symptoms of carbon monoxide poisoning: headache, dizziness, weakness, nausea, vomiting, sleepiness, and confusion. Carbon monoxide reduces the blood's ability to carry oxygen. Low blood oxygen levels can result in loss of consciousness and death.
- See a doctor if you or others develop cold- or flu-like symptoms. Carbon monoxide poisoning, which can easily be mistaken for a cold or flu, is often detected too late.
- Alcohol consumption and drug use increase the effects of carbon monoxide poisoning.
- Carbon monoxide is especially toxic to mother and child during pregnancy, infants, the elderly, smokers, and people with blood or circulatory system problems, such as anemia or heart disease.

A WARNING Fire Hazard

When operating your Traeger® Grill, maintain a
 MINIMUM distance of 18 inches (45.7 cm) from the
 grill to any nearby combustibles, including wooden
 railings, home siding, window frames, furniture, trees,
 and trash receptacles, etc.

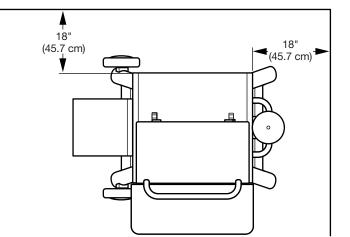

- Do not install or operate this grill indoors or under a combustible ceiling or overhang.
- Do not install or operate your Traeger® Grill on combustible floors or surfaces.
- Remove pots and pans while the operating appliance is unattended, to reduce the risk of fire.

▲ WARNING Fire Hazard

- Keep your Traeger[®] Grill clean. Grease fires are caused by not properly maintaining your grill and failing to clean its Traeger[®] Grease Management System on a consistent basis (see "Maintaining Your Grill" on pages 22-23).
- Even if there is ample room in the grill, be cautious
 of loading excessive amounts of food or high fat
 content foods (e.g., bacon) that can release large
 quantities of flammable grease.
- Do not place food near the edges of the grill where grease drippings may miss the grease drip tray and fall to the bottom of the grill, where they could come into contact with embers from the firepot and ignite.
- Always make sure the heat baffle and drip tray are properly seated on their locating brackets. If not installed correctly, direct heat and flame from the firepot could cause a grease fire or damage the Traeger® Grease Management System.
- Never use gasoline, lantern fuel, kerosene, lighter fluid, or other flammable materials to start or "freshen up" a fire.
- Never use or store flammable liquids or other combustibles materials near the grill.
- Never attempt to over-fire your grill by adding excess pellets or other combustible materials to the firepot or the hopper.

A DANGER In the event of a grease fire, ensure the grill door and hopper lid are closed, and then immediately unplug the grill if you can do so safely. Move away from the grill until the fire is completely out and grill has cooled down. Until the fire has extinguished and the grill has cooled off:

- Do Not move the grill;
- Do Not throw water on the grill;
- Do Not use salt or baking soda to put out a grease fire; and
- Do Not try to smother the fire.

With the grill door and hopper closed, the fire will be starved of oxygen and burn itself out. Never keep the grill door or hopper lid open during a grease fire; if the grill door is open, use a non-combustible tool that will allow you to close the grill door while keeping a safe distance from the grill. An all-class (class ABC) approved fire extinguisher should be used if a fire is not contained within the grill. If an uncontrolled fire does occur, immediately call the Fire Department. When the fire is completely out, allow the grill to cool completely. Remove everything from the inside of your grill, including all internal components (grill grates, drip tray, heat baffle, and firepot), pots and pans, and food.

Clean the entire grill, including any grease accumulation from the Traeger® Grease Management System (TGMS) and all ash and pellets from the grill and firepot (see "Maintaining Your Grill" on pages 22-23). Replace the firepot, heat baffle, grease drip tray, and grill grates, restart the grill, and resume cooking.

A WARNING Fire Hazard

Always allow grill to cool completely before clearing the auger.

▲ WARNING Burn Hazard

Ashes should always be completely cool before handling. Ashes should be placed in a metal container with a tight-fitting lid. The closed container of ashes should be placed on a noncombustible floor or on the ground, well away from all combustible materials, pending final disposal. Ashes should be retained in the closed container until they are disposed.

▲ WARNING Burn Hazard

Many parts of the grill become very hot during operation. During operation of the grill and afterwards, care must be taken to avoid burns while the grill is hot.

- **Never** leave the grill unattended when young children or pets are present.
- Never move the grill when it is operating or hot.
 Let the grill cool thoroughly and close the grill door
 before moving or attempting to transport. If you are
 transporting your grill in a vehicle after cooking on it,
 make sure the fire is completely out and the grill is
 cold before placing it in any vehicle. Never put water
 into the firepot; it will jam the auger.
- **Never** add pellets by hand to a hot firepot. This is dangerous and you may be seriously burned. If you run out of pellets and lose your fire while cooking, let the grill cool completely and start again. (See page 19, "Hopper Clean-out" instructions).
- Grill grates and meat probe are extremely hot when preheated. Please use caution when loading food onto the grill grates and when inserting, removing, or adjusting your meat probe.
- **Never** move the grill with the door open. Always close the grill door prior to moving.

▲ WARNING Smoke Hazard

 If there is a delayed start and the smoke from your grill changes from transparent white smoke to unusual billowing thick non-transparent white smoke that turns to a yellow tinted smoke, immediately turn off your grill using the main power switch on the back of the pellet hopper or unplug the power cord.

Do Not initiate the shutdown cycle.

3

IMPORTANT SAFETY PRECAUTIONS CONTINUED

- ◆ DANGER Do Not open the grill door to air out the grill. Stay away from the grill until smoke clears and the grill completely cools.
- This may be the result of a pellet overflow condition, which is caused by partial ignition of pellets. If allowed to continue long enough, gases will build up, which can ignite. If these gases ignite they will combust all at once, making a loud noise that may startle and/or injure persons in the immediate vicinity of the grill, and the grill door may open and close. This occurrence is sometimes referred to as a "grill burp" and should be avoided. If you have not properly maintained your grill, as described in "Maintaining Your Grill" on pages 22-23, a hazardous grease fire may also result.
- If a burp occurs, let the grill cool down completely, remove all internal components (including grill grates, drip tray, heat baffle, and firepot), and thoroughly clean all ash and pellets from the grill and firepot (see page 23, "Cleaning the Ash from Inside and Around the Firepot") and ensure that grease and other buildup has been removed (see pages 22-23, "Maintaining Your Grill"). Remove all pellets from the pellet hopper. Run the prime auger sequence to push all pellets out of the auger and dispose of those pellets. Clean all pellets out of the firepot. Fill hopper with new pellets and prime the auger (see "Seasoning Your Grill" on page 13 for instructions on priming your auger).
- A DANGER Do Not stick your hand in or near the auger located at the bottom of your pellet hopper. Severe injury will occur if the auger is turning and your hand is caught in the auger. Do not remove the honeycomb guard in your pellet hopper. No maintenance should be performed on or around the auger while the grill is turned on or plugged into power.

▲ WARNING Electrical Shock Hazard

Hazardous voltage is present, which can shock, burn, or cause death.

- Ground Fault Circuit Interrupter (GFCI) protection must be provided on the circuit(s) or outlet(s) to be used for the operation of this Traeger® Grill.
- Disconnect the power cord before servicing the grill unless otherwise noted in this Owner's Manual.
- If using an extension cord, only use an extension cord suitable for outdoor use to prevent electric shock in accordance with the instructions and warnings accompanying that product. This type of cord is designated with "W-A" or "W" on the cord's

- jacket, such as an extension cord of cord type: SW-A, SOW-A, STW-A, STOW-A, SJW-A, SJOW-A, SJTW-A, or SJTOW-A.
- If using an extension cord, be sure to use a No. 14 AWG grounded extension cord.
- Do not modify the plug on your Traeger® Grill, the extension cord receptacle, or the extension cord plug in any way, including by removing the ground (earth) prong.
- Make sure your extension cord is in good condition.
 Inspect extension cords prior to each use for loose or exposed wires and cut or worn insulation. Replace if damaged. Never use a damaged extension cord.
- Ensure that the power cord and extension cord are securely plugged together. Do not plug extension cords into one another.
- Keep extension cord clear of snow and standing water.
- Ensure that the power cord and extension cord do not create a tripping hazard. Do not route an extension cord through a window or doorway.
- When not in use, the extension cord should be removed and stored in a location protected from the sun and out of the reach of children.

A CAUTION

- Never modify this grill or install any parts or components not authorized by Traeger for use with this grill. Any modification of this grill or installation of unauthorized parts or components will void the warranty and may create a safety hazard including, without limitation, a fire.
- Children should be supervised to ensure they do not play with the grill.
- Do not put a grill cover or anything flammable in the storage space area under the grill.

A CAUTION Use Correct Pellets

- This grill is designed and approved only for all-natural wood cooking pellets designed for wood pellet grills.
 Use of any other type of fuel in this grill will void the warranty, may lead to the auger becoming jammed, and may create a safety hazard.
- For best results and flavor, use genuine TRAEGER® BRAND HARDWOOD PELLETS.
- Always store wood pellets in a dry location, away from heat-producing appliances and other fuel containers.

A WARNING Do not use fuel pellets. Never use heating fuel pellets in the grill because they may contain hazardous contaminants and additives and may damage the grill.

A CAUTION Minimum Ambient Temperature

 When the ambient temperature falls below -20°F (-29°C), damage to the controller's display may occur.

A WARNING Improper placement of the meat probe or improper meat probe calibration could result in raw or undercooked meats, which may increase your risk of foodborne illness.

A WARNING If the fire in the firepot goes out while cooking, it is important to follow these steps. Failure to do so may cause a hazardous "overfiring" of your grill due to an excess of unburned pellets in the firepot. This is often caused by improper start-up procedure and/or running out of pellets.

- Turn the main power switch at the back of the grill hopper to OFF (O) and disconnect the power cord.
 Allow the grill to cool thoroughly. Open the door and remove all food, grill grates, drip tray, and heat baffle.
- Remove all unburned pellets and ash from inside and around the firepot. (See instructions for proper handling and disposal of ash on page 23.)
- Before replacing the heat baffle, drip tray, and grill grates, plug the power cord into an appropriate grounded/earthed electrical outlet and turn the main power switch to ON (I). Pellets should fall into the firepot and the hot rod should begin to heat (it will start to turn red).

 CAUTION Do not touch the hot rod.

 When flames start to come out of the firepot, turn the main power switch to OFF (O). Let the grill cool down. Now you're ready to place the heat baffle, grease drip tray, grill grates, and food back into the grill.


A WARNING

- Turn the main power switch to OFF (O) and disconnect the power cord before initiating any maintenance.
- Accumulated grease is easier to clean off when the grill is still warm—not hot. Be careful not to burn yourself. Heat-protective gloves are recommended.
- A dedicated vacuum cleaner is the best way to remove ashes from the firepot, but this must be done with extreme care to avoid the risk of fire. Again, cleaning the ash from in and around the firepot should be done only when the grill is COLD.
- Cleaning the grill grates works best while they are still warm. Be careful not to burn yourself.
 Heat-protective gloves are recommended. We recommend keeping a long-handled cleaning brush near the grill. After removing your food, give the grill grate a quick brushing. It takes only a minute and it will be ready the next time you want to use the grill.

SAVE THESE INSTRUCTIONS

5



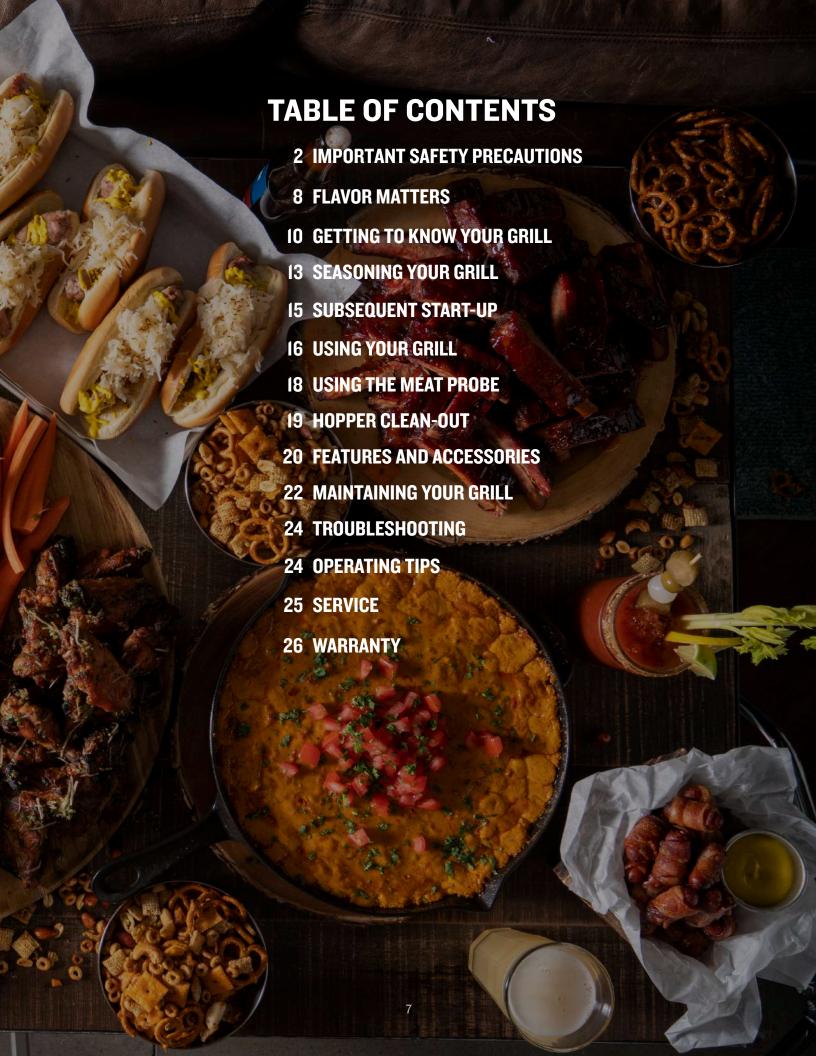

FLAVOR MATTERS. WOOD ISN'T JUST THE FUEL, IT'S THE SECRET INGREDIENT.



THE PERFECT PAIRINGS



Bold cuts of beef need bold wood flavors to match, like hickory or mesquite.



Throw in some pellets and turn your Traeger into a wood-fired pizza oven.

NO FILLERS
BINDERS
NO WORRIES





Cherry pie cooked over fruit hardwood pellets? Yes please.

ALL NATURAL HARDWOOD PELLETS CONSISTENT PERFORMANCE & FLAVOR

HOW OUR PELLETS ARE MADE



Traeger pellets are made from all natural hardwood sawdust.



2 The sawdust is compressed into pellets using heat and pressure.




3 Pellets fuel the fire and add flavor to make meals unforgettable.


GETTING TO KNOW YOUR GRILL

Refer to the Assembly Guide to assemble and install your Traeger® Fremont Grill.

PARTS AND FEATURES

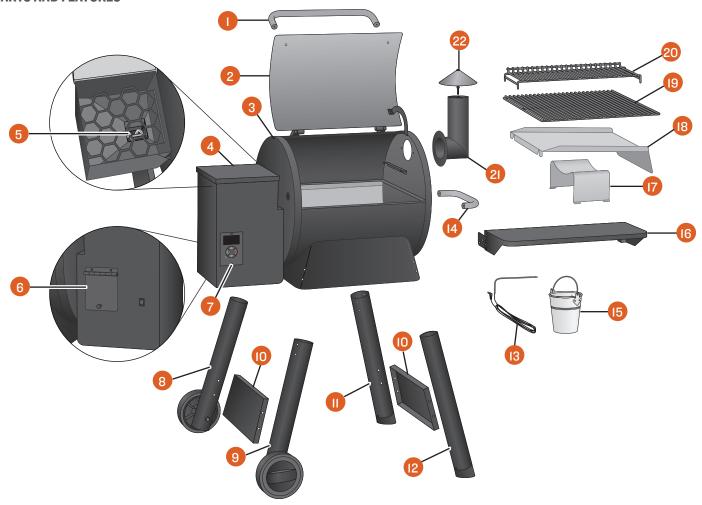


PART	DESCRIPTION	PART	DESCRIPTION
0	DOOR HANDLE	12	FRONT FIXED LEG
2	GRILL DOOR	13	MEAT PROBE
3	GRILL BARREL	14	SIDE LIFT HANDLE
4	PELLET HOPPER	15	GREASE BUCKET
5	AUGER (PELLET HOPPER INTERIOR)	16	FRONT SHELF
6	PELLET HOPPER CLEAN-OUT DOOR	17	HEAT BAFFLE
7	DIGITAL PRO CONTROLLER	18	GREASE DRIP TRAY
8	REAR WHEELED LEG	19	PORCELAIN-COATED GRILL GRATE
9	FRONT WHEELED LEG	20	EXTRA GRILL RACK
10	LEG BRACES	21	CHIMNEY PIPE
	REAR FIXED LEG	22	CHIMNEY CAP

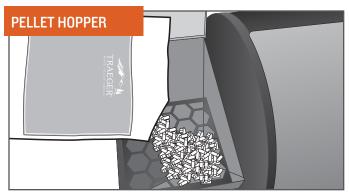


An I8 lb. (8.2 kg) capacity pellet hopper will keep you cooking for hours. Pair that with Traeger's Digital Pro Controller and delicious food is just a "click" away.



With 572 sq. in. $(0.37 \, \text{m}^2)$ of grilling space and up to 76,000 BTUs of wood-fired heat, your Traeger® Grill has the real estate for party-sized orders of T-bones or racks of ribs, with enough room left over to handle those side dishes, too.

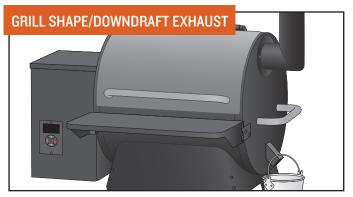

Traeger's signature grill shape/downdraft exhaust creates a vortex of convection. It circulates hot, smoky air around the cooking chamber, surrounding your food with wood-fired heat for even cooking on all sides. The smoky air is always present during cooking, even if you don't see it.

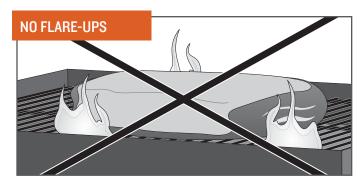

You don't have to worry about drippings flaring up and causing nasty fireballs that destroy your meal, because Traeger® Wood Fired Grills cook using indirect heat. All drippings are safely channeled into an external grease bucket for easy disposal.


TIPS:

11

- Take care of your grill by using a new Traeger® drip tray liner before each cook to help keep your grill clean.
- Keep your grill clean. See "Operating Tips" (page 24) and "Maintaining Your Grill" (page 22).

GETTING TO KNOW YOUR GRILL CONTINUED

YOUR CONTROL PANEL AND DISPLAY Your Traeger® Fremont Grill is equipped with a digital controller with AGL (Advanced Grilling Logic). Before you begin using the grill, it will be helpful to familiarize yourself with the different features of the control panel.

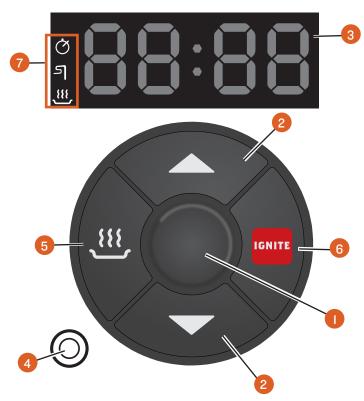

ARC CONTROLLER GUIDE

KEEP WARM FUNCTION



Keep Warm can be used to pause the cook cycle at any time during grilling. Simply press "Keep Warm" again to resume cooking. Keep Warm maintains the grill temperature at I65°F (74°C).

PRESS AND HOLD FUNCTIONS

NOTE: For the following, when the grill is in standby mode, press and hold the buttons indicated for 2 seconds.

- PRIME THE AUGER "Pri" will flash on the display, and the auger will prime for 30 seconds. Repeat to cancel.
- GRILL SHUTDOWN "OFF" will flash on the display nine times. Grill will display "COOL DN" for 15 minutes as it cools down. To cancel, repeat while "OFF" is flashing.
- CHANGE BETWEEN °F/°C Grill will change the display between °F and °C.
- DISPLAY FIRMWARE Firmware will scroll across the display. **NOTE:** The letter "v" will display as "u."

CENTER BUTTON

Use this button to turn on the grill and cycle through TEMPERATURE > TIMER > PROBE ALARM modes. Press and hold for two seconds to cancel a setting. To put the grill in the shutdown cycle, press and hold the button for two seconds in Temperature Adjustment mode.

2 UP/DOWN BUTTONS

Press the "Up" or "Down" button to increase or decrease temperature or time. Press and hold to increase or decrease the time rapidly.

NOTE: Press and hold the "Up" and "Down" buttons at the same time for 3 seconds to switch between Celsius and Fahrenheit.

STATUS DISPLAY

Shows current temperature, time remaining in timer mode, or probe cooking temperature.

4 MEAT PROBE JACK

Plug the meat probe into the jack for probe cooking.

5 KEEP WARM

This feature maintains the grill temperature at I65°F (74°C) to keep food warm.

6 IGNITE

Press IGNITE to start the grill.

7 INDICATOR LIGHT PANEL


The icons on this panel will light up when the corresponding feature is active.

- The Timer icon will light when the timer is active.
- The Meat Probe icon will light once the probe is plugged in and recognized by the grill.
- The Keep Warm icon will light while this feature is active.


NOTE: Temperature fluctuations are normal for Traeger® Grills. Any significant fluctuation could be the result of wind, air temperature, improper use, or lack of grill maintenance.

SEASONING YOUR GRILL


TO BE USED ON INITIAL FIRING ONLY. In order to ensure the best flavor, optimal performance, and proper and safe operation of the grill, follow the instructions below to season your grill.

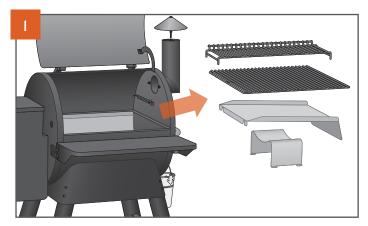


Remove the grill grates, grease drip tray, and heat baffle from the inside of the grill.

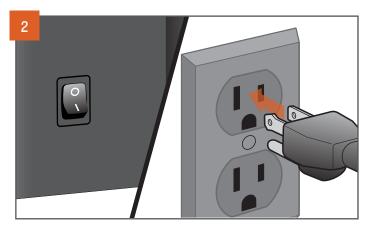

PLUG APPEARANCE MAY VARY BY REGION.




With the main power switch on the back of the grill hopper in the OFF (0) position, plug the power cord into an appropriate grounded/earthed GFCI electrical outlet.

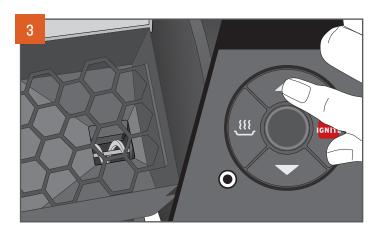


Open the hopper lid. Make sure there are no foreign objects in the auger before adding pellets to the hopper. Turn grill on: Flip the main power switch on the back of the grill to ON (I). With the grill in standby mode, press and hold the "Up" and IGNITE buttons simultaneously. The display will flash "Pri" and the auger will begin priming.

NOTE: Once you turn on your grill, it will enter standby mode, and the display's dashed border will pulse. This indicates your grill is awaiting a command, and is not actively operating. The grill MUST be in standby mode to prime the auger.




13

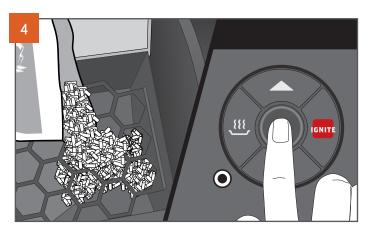


After adding pellets to the hopper, close the hopper lid. We recommend you fill the hopper with pellets at least to the safety grate in the hopper. Press the center button.



SEASONING YOUR GRILL CONTINUED

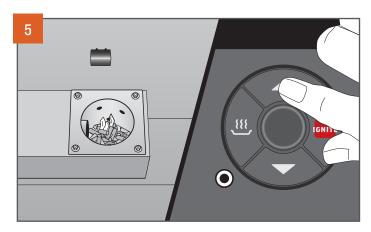

Continue priming until a small amount of pellets are in direct contact with the hot rod in the firepot. Press and hold the "Up" and IGNITE buttons simultaneously to stop priming and return the grill to standby mode.

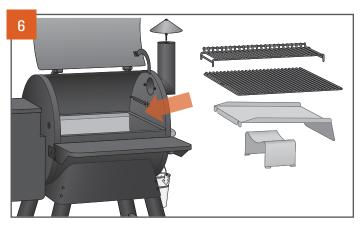

Now you're ready to place the heat baffle, grease drip tray, and grill grates back into the grill.

RECOMMENDATION: For easy cleanup, line the grease drip tray with Traeger® Aluminum Drip Tray Liners or heavy-duty aluminum foil. If using foil, be sure the edges and ends of the foil are tight against the bottom of the grease drip tray. Replace foil after each cook to reduce the possibility of a grease fire. Please see "Maintaining Your Grill" on page 24 for more details.




Press the "Up" button until the temperature display reads 450° F (250°C).

NOTE: To change between Celsius (C) and Fahrenheit (F), press and hold the "Up" and "Down" buttons simultaneously.



Press the IGNITE button. Let the grill run at 450°F (250°C) for 30 minutes with the door closed to complete the seasoning process.

SUBSEQUENT START-UP

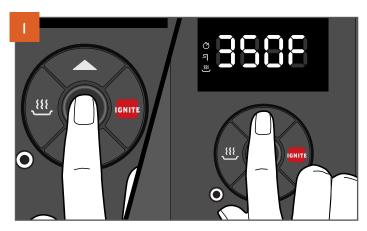

With the main power switch set to ON (I), press the center button once to wake the grill controller. Set the desired temperature with the "Up" button.

NOTE: Once you press the IGNITE button, your Traeger® Fremont Grill will always begin with an ignition and preheat cycle.

WARNING! WHEN OPERATING THIS GRILL, MAINTAIN A MINIMUM CLEARANCE OF 18 IN. (45.7 CM) FROM GRILL TO COMBUSTIBLES.



Once the desired temperature is displayed, press IGNITE. Allow grill to preheat until desired temperature is achieved.

NOTE: If the grill fails to achieve the selected temperature, please see "Operating Tips" on page 24 for more information.

CONTROL SHUTDOWN CYCLE

15

The control for this grill comes with an automatic shutdown cycle. When finished cooking on your grill, press and hold the center button for 3 seconds. The display will flash "OFF" for several seconds, then scroll "COOL Dn" followed by the actual temperature until the grill cools down enough to put out the fire in the firepot.

While the controller is flashing "OFF," you can cancel the shutdown cycle by pressing and holding the center button for two seconds.

Always allow the shutdown cycle to completely finish before powering off your grill at the main power switch. The shutdown cycle ensures the fire is suppressed and the grill ignites properly on the next use.


DANGER! TURNING OFF THE MAIN POWER SWITCH WILL CUT POWER TO THE GRILL COMPONENTS ONLY.
WHEN SERVICING THE CONTROL OR ANY OTHER PARTS, ENSURE THAT THE POWER SUPPLY IS DISCONNECTED TO AVOID AN ELECTRICAL SHOCK HAZARD.

USING YOUR GRILL

YOU WILL NEED TO BEGIN WITH THESE STEPS EVERY TIME YOU USE YOUR GRILL.

PRE-GRILLING CHECKLIST

- 1. Check for and do needed maintenance:
 - Clean the Traeger® Grease Management System:
 - Grill Grates
 - Drip Tray
 - Grease Trough
 - Grease Chute
 - Grease Bucket
 - Remove ash (after approximately 20 hours of cooking).
 - Check the power cord for twists, damage, or fraying.
- 2. Make sure the grill is correctly assembled with all parts present before using it:
 - Heat Baffle
 - Drip Tray
 - Grates
- 3. Make sure you have proper airflow:
 - Ensure nothing is obstructing the exhaust.
- 4. Make sure the grill is a safe distance from combustibles (see page 2).
- 5. Make sure the grill is on a level surface.
- 6. Inspect the pellets:
 - Make sure you have enough pellets in the hopper.
 - · Make sure the pellets are not wet.
- 7. Close the hopper lid.
- 8. Close the grill door.

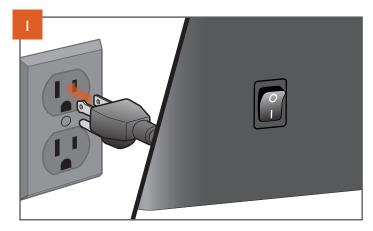


PLUG APPEARANCE MAY VARY BY REGION.


WARNING! GROUND FAULT CIRCUIT INTERRUPTER (GFCI) PROTECTION MUST BE PROVIDED ON THE CIRCUIT OR OUTLET USED TO POWER THE GRILL.



Press the "Up," "Down," or center button to wake the grill.

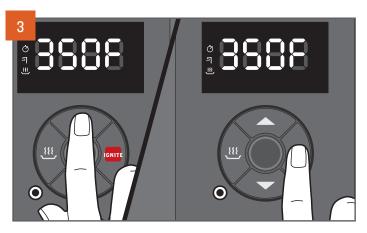

Once your grill is on, press the "Up" button to select your desired temperature, then press IGNITE to start the preheat cycle.

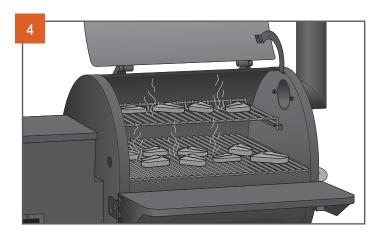


Once preheating is complete, load food into the grill.



WARNING!

- WHEN OPERATING THIS GRILL, MAINTAIN A MINIMUM CLEARANCE OF 45.7 CM (18 INCHES) FROM GRILL TO COMBUSTIBLES, SUCH AS WOODEN RAILINGS OR HOME SIDING.
- NEVER OPERATE THIS GRILL UNDER A COMBUSTIBLE CEILING OR OVERHANG.
- ONLY OPERATE GRILL OUTDOORS.

- USE ONLY TRAEGER® BRAND HARDWOOD PELLETS, WHICH ARE SPECIFICALLY MADE TO WORK IN OUR GRILLS. NEVER USE HEATING FUEL PELLETS IN THE GRILL.
- WE RECOMMEND YOU CLEAN THE GREASE DRIP TRAY AND TGMS FREQUENTLY TO REDUCE THE POSSIBILITY OF A GREASE FIRE. PLEASE SEE "MAINTAINING YOUR GRILL" ON PAGE 22 FOR MORE DETAILS.

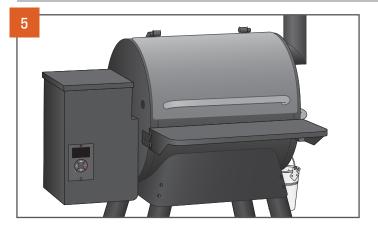

Close the grill door to proceed with cooking. Unlike a gas grill, you must keep the grill door shut during cooking.


IN CASE OF FIRE:




WARNING! WITH REGULAR MAINTENANCE AND CLEANING OF YOUR TRAEGER® GRILL, A GREASE FIRE IS UNLIKELY. IN THE UNLIKELY EVENT OF FIRE, IMMEDIATELY TURN THE GRILL OFF (0) AND LEAVE THE GRILL DOOR CLOSED UNTIL THE FIRE IS OUT. UNPLUG THE POWER CORD IF YOU CAN DO SO SAFELY. DO NOT THROW WATER ON THE UNIT. DO NOT TRY TO SMOTHER THE FIRE. WITH THE GRILL DOOR CLOSED, THE FIRE WILL BE STARVED OF OXYGEN AND BURN ITSELF OUT. IF AN UNCONTROLLED FIRE DOES OCCUR, CALL THE FIRE DEPARTMENT.

USING THE MEAT PROBE


Your Traeger® Fremont Grill includes a meat probe for when your recipe specifies an internal goal temperature for your food.

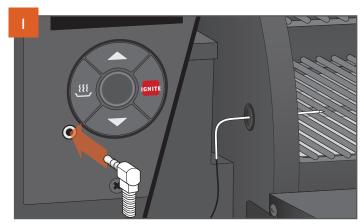

Insert the meat probe into the plug-in hole on the lower left corner of the controller; then thread probe through the access hole grommet on the left side of the grill barrel.

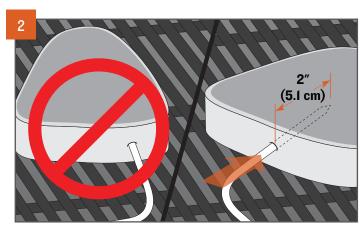

Insert the probe tip into the thickest part of the meat—not in the fatty portion or touching bone. The probe needs to be in the meat at least 2 inches (5.1 cm). This probe may not be suitable if you can't insert the probe into the thickest part of the meat and 2 inches (5.1 cm) into the meat.

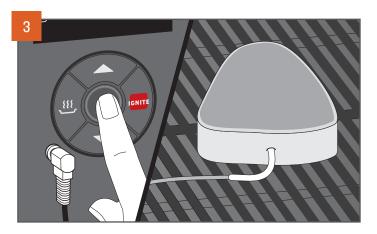

Reading the temperature: Press the center button on the control. The probe temperature will display for 5 seconds, then revert back to the temperature of the grill. After removing your food from the grill, always use a meat thermometer to confirm that you have actually achieved the target internal meat temperature.



WARNING!

- MEAT PROBE IS EXTREMELY HOT DURING AND AFTER COOKING; USE CAUTION WHEN REMOVING.
- IMPROPER PLACEMENT OF THE MEAT PROBE OR IMPROPER MEAT PROBE CALIBRATION COULD RESULT IN RAW OR UNDERCOOKED MEATS, POULTRY, SEAFOOD, SHELLFISH, OR EGGS, WHICH MAY INCREASE YOUR RISK OF FOODBORNE ILLNESS.


WARNING! CONSUMING RAW OR UNDERCOOKED MEATS, POULTRY, SEAFOOD, SHELLFISH, OR EGGS MAY INCREASE YOUR RISK OF FOODBORNE ILLNESS.

MEAT TEMPERATURE RECOMMENDATIONS

RANGE	BEEF	LAMB	PORK	POULTRY
Well	170°F/77°C	160°F/71°C	170°F/77°C	170°F/77°C
Medium	160°F/71°C	I55°F/68°C	160°F/71°C	170°F/77°C
Medium Rare	145°F/63°C	145°F/63°C		170°F/77°C
Rare	135°F/57°C			170°F/77°C

HOPPER CLEAN-OUT

Your Traeger® Fremont Grill has a hopper clean-out system that allows you to remove pellets from the pellet hopper or quickly change from one pellet flavor to another without making a mess.

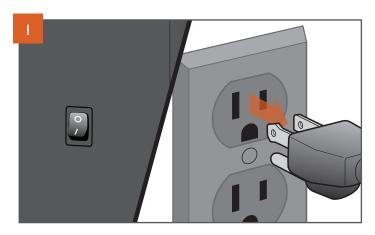


PLUG APPEARANCE MAY VARY BY REGION.

Turn the main power switch to OFF (0) and disconnect the power cord. If the grill is still hot, allow it to cool completely.





Place a container large enough to hold the unused pellets under the pellet clean-out door.

TIP: A clean 5-gallon (19-liter) bucket works great!

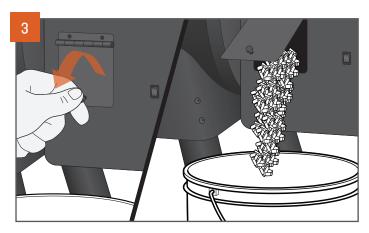

Unscrew the clean-out door fastener and open it. Pellets will empty into the container you've placed below. You might need a spatula or spoon to push the remaining pellets out of the hopper.



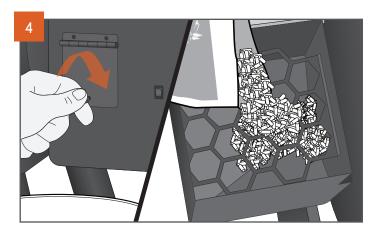

Once the hopper is empty, close the clean-out door, replace the fastener, and refill the hopper with your preferred flavor of TRAEGER® BRAND HARDWOOD PELLETS.


TRAEGER.COM

19

FEATURES AND ACCESSORIES

STANDBY MODE

Throughout this manual, you will be instructed to perform some actions while the grill is in standby mode. When the grill is in standby mode, the display's dashed border will pulse to indicate it is not actively operating and is awaiting a command. The grill automatically enters standby mode when you first turn it on.



TIMER

Your Traeger® Fremont Grill comes equipped with a convenient timer. The timer function does not impact grill operation; you can use it to notify you of other needed steps during cooking, such as loading vegetables or other shorter time cooks into the grill or basting your food.

NOTE: When adjusting time, press and hold the "Up" or "Down" buttons to advance the time rapidly.

TO SET THE TIMER:


- With the grill controller on, press the center button once to enter Timer mode.
 The hours digits will flash.
- 2. Press the "Up" button to select hours; press the center button to confirm and move to minutes.
- **3.** Press the "Up" button to select minutes; press the center button to confirm. The Timer icon will appear and time will begin counting down.

TO CANCEL THE TIMER:

- 1. Press the center button until the time remaining is displayed.
- 2. Press and hold the center button for 2 seconds to cancel the Timer.

TO ADJUST THE TIMER:

- 1. Press the center button until the time remaining is displayed.
- 2. Use the "Up" or "Down" buttons to adjust the time as needed.
- Press the center button to confirm. The Timer icon will appear and time will resume counting down.

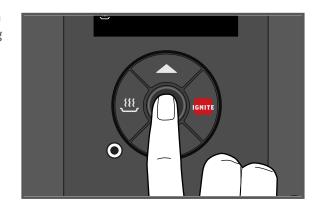



KEEP WARM FUNCTION



Keep Warm can be used to pause the cook cycle at any time during grilling. Press "Keep Warm" to activate the function and maintain the grill temperature at I65°F (74°C). Press "Keep Warm" again to resume cooking.

FRONT SHELF

To fold down the shelf, pull up on the shelf until it releases, then lower to the grill body.



WARNING! PINCH HAZARD: KEEP HANDS CLEAR WHEN RAISING OR LOWERING THE SHELF.



MAINTAINING YOUR GRILL

▲ WARNING Fire Hazard: Grease fires are most frequently caused by failing to properly maintain the grill by not cleaning the grease from the grill on a consistent basis.

▲ WARNING Turn the main power switch on back of the grill hopper OFF (0) and disconnect the power cord before initiating any of the maintenance below.

1. CLEANING YOUR TRAEGER® GREASE MANAGEMENT SYSTEM ("TGMS"):

During your cooks, grease drippings will fall onto (i) the grease drip tray and be channeled into (ii) the grease drain (the "Trough") and then out of the grill through (iii) the grease drain tube, (iv) to be collected in the grease bucket. These four components are the components of the Traeger® Grease Management System (TGMS). Grease will accumulate in all of these locations and should be regularly cleaned to reduce the risk of fire.

How often you need to clean the TGMS depends on the fat content of your food. Fattier foods will require cleaning of the TGMS more often, and sometimes you will need to clean the TGMS after every cook.

Visible pieces of food and bits of hardened grease or other buildup indicate a need for cleaning.

All components of the TGMS should be inspected before each use for signs of grease buildup.

▲ WARNING Accumulated grease is easier to clean off when the grill is still warm—not hot. Be careful not to burn yourself. Heat-protective gloves are recommended.

Clean the grease out of the V-shaped grease drain (the "Trough") and grease drain tube. We recommend cleaning these locations regularly.



Remove all grill grates, grease drip tray, and heat baffle.
This will provide access to the V-shaped grease drain and grease drain tube opening inside the grill. Scrape the grease accumulation from



inside the V-shaped grease drain and grease drain tube using a stiff, nonmetallic tool. Much of the loosened grease can be pushed down through the grease drain tube and will fall into the grease bucket. Wipe up remaining grease residue with paper towels or disposable rags.

Regularly clean the grease out of the grill on the interior bottom and sides. If grease is allowed to build up, a grease fire could result.

Scrape the grease accumulation from inside the grill using a stiff, nonmetallic tool. Much of the



loosened grease can be removed using paper towels or disposable rags. Excessive scraped-off residue can be cleaned using a vacuum cleaner as described in Step 4 (page 23) when cleaning the firepot of ashes.

Inspect and clean the heat baffle for any grease or debris.

NOTE: Traeger's drip tray liners can help keep your grill clean and can help reduce the risk of flare-ups.

2. CREOSOTE REMOVAL:

When wood pellets are burned slowly, they produce tar and other organic vapors that combine with expelled moisture to form creosote. The creosote vapors condense in the relatively cool exhaust vent of a slow-burning fire. As a result, creosote accumulates on the exhaust vent lining. When ignited, creosote makes an extremely hot fire. Airborne grease particles will travel through the cooking chamber, and some of this airborne grease will accumulate on the exhaust vent lining, similar to creosote, which could contribute to a fire.

Periodically scrape the creosote and grease accumulation from the inside of the vertical and horizontal sections of the flue pipe or interior lining using a stiff, nonmetallic tool. A wooden paint stir stick, for example, would work for this task. Once the creosote and grease residue have been loosened from the interior lining and ventilation gaps in this downdraft system, much of it can be removed with paper towels or disposable rags. Do not spray water or other liquid cleaners onto the inside of your grill to remove creosote.

NOTE: The Traeger® Downdraft Exhaust System should be inspected at least twice a year to determine when a creosote and/or grease buildup has occurred.

When creosote or grease has accumulated, it should be removed to reduce the risk of a fire.

3. OUTSIDE STORAGE:

A CAUTION If the grill is stored outside, care should be taken to ensure that water does not get into the pellet hopper. Wood pellets expand greatly when wet and will jam your auger. Always cover your grill when not in use with a Traeger® Grill Cover. This custom-fit cover can be purchased at traeger.com.

4. CLEANING THE ASH FROM INSIDE AND AROUND THE FIREPOT (AFTER APPROXIMATELY 30 HOURS OF COOKING):

▲ WARNING Make sure that the grill is COLD and ashes are extinguished and COLD before cleaning the ash.

▲ WARNING Disposal of ashes should be done only according to the following instructions.

Excess ash in the firepot will hamper ignition and may cause your fire to go out. The firepot should be inspected occasionally and cleaned to remove the ash buildup. Again, cleaning the ash from in and around the firepot should be done only when the grill is COLD.

Remove the grill grates, grease drip tray, and heat baffle to provide access to the firepot and the interior of the grill. Much of the ash outside of the firepot can be removed from the grill with a shop vac.



A WARNING A dedicated vacuum cleaner is the best way to remove ashes from the firepot, but this must be done with extreme care to avoid the risk of fire. Again, cleaning the ash from in and around the firepot should be done only when the grill is COLD.

A utility-type vacuum cleaner having a metal collection canister without a bag would be best for this task. However, almost any vacuum cleaner will work safely if this procedure is properly followed.



After ensuring that the ash in the firepot is COLD, vacuum the ash from the inside of the firepot.

- a. If your vacuum cleaner is a bagless model, empty any previously accumulated debris from the collection chamber. Then vacuum the ash from the inside of the firepot. Once the firepot is clean, empty the collection chamber into the metal container handled in the manner described below under Disposal of Ashes without delay. Make sure that there is no remaining ash residue left in the collection chamber.
- b. If your vacuum cleaner is a model that uses a disposable bag, install an unused bag in the machine. Then vacuum the

ash from the inside of the firepot. Once the firepot is clean, remove the bag from the vacuum cleaner and place it in a metal container handled in the manner described under Disposal of Ashes below.

5. DISPOSAL OF ASHES:

A WARNING Ashes should always be completely cool before handling. Ashes should be placed in a metal container with a tight-fitting lid. The closed container of ashes should be placed on a noncombustible floor or on the ground, well away from all combustible materials, pending final disposal. Ashes should be retained in the closed container until they are disposed.

6. CLEANING THE GRILL GRATES:

A WARNING Cleaning the grill grates works best while they are still warm. Be careful not to burn yourself. Heat-protective gloves are recommended. We recommend keeping a long-handled cleaning brush near the grill. After removing your food, give the grill grate a quick brushing. It takes only a minute and it will be ready the next time you want to use the grill.

7. CLEANING OUTSIDE SURFACES:

A WARNING Turn the main power switch OFF (0) and disconnect the power cord before initiating cleaning.

Use a disposable rag or cloth dampened with Traeger® All Natural Cleaner or warm, soapy water to wipe the grease from the outside of the grill. DO NOT use oven cleaner, abrasive cleansers, or abrasive cleaning pads on the outside grill surfaces.

8. TESTING THE GRILL AFTER CLEANING:

Before replacing the heat baffle, grease drip tray, and the grill grates, plug the power cord into an appropriate grounded/earthed electrical outlet and turn the main power switch ON (I). After you set the temperature and press IGNITE, pellets should fall into the firepot and the hot rod should begin to heat (it will start to turn red).

A WARNING Do not touch the hot rod.

When flames start to come out of the firepot, run the shutdown cycle. Let the grill cool down. Now you're ready to place the heat baffle, grease drip tray, grill grates, and food back onto the grill.

9. POWER CORD

If the power supply cord is damaged, it must be replaced by a special cord assembly available from Traeger.

FREQUENTLY ASKED QUESTIONS

Scan this QR code to take you to Frequently Asked Questions.



23

TROUBLESHOOTING

ERROR MESSAGES

Although rare, you may see an error or warning message display on your control panel. Please refer to the following chart for a list of error messages and how to resolve them:

CODE	ERROR	SOLUTION
LEr	Low temperature	This will occur if the temperature of the grill falls below I20°F (49°C) for I0 minutes, causing the grill to go into the shutdown cycle. To fix, remove any pellets from the firepot. Turn the controller off and then on again and restart your grill. If the problem persists, contact customer service (see page 25).
HEr	High temperature	This error will occur when the temperature in the grill reaches temperatures above 550°F (288°C) for more than 45 seconds. Let the grill cool, then turn off the grill. Clear out any remaining pellets from the firepot and restart your grill. If the problem persists, contact customer service (see page 25).
Erí	Temperature sensor loose	Check to make sure your temperature sensor is correctly plugged into the controller.
Er2	Temperature sensor bad	Your temperature sensor is faulty and needs to be replaced.

OPERATING TIPS

- You can change the temperature at any time during grilling to increase or decrease cooking temperature. It is best practice to give the grill some time to reach the desired temperature before making additional temperature changes.
- 2. To change between Fahrenheit and Celsius:
 - a. Press and hold the "Up" and "Down" buttons simultaneously for 3 seconds.
 - b. Press the center button to confirm and exit.
 You will now see temperatures displayed in the format you've chosen.
- Your Traeger[®] Grill is designed to operate with the door closed.
 Opening the grill door greatly lengthens your cooking time.
 - When putting frozen, raw, cold, or otherwise uncooked food on the grill, this may result in a temporary drop of your grill's internal temperature.
- **4.** Do not overload cooking surface with excessive amounts of food that reach beyond the edges of the footprint of the drip tray. This can lead to interference with proper cooking airflow and may lengthen the time to reach the set temperature.
- 5. Always take into account the type of food you are cooking:
 - Thin foods need high heat and shorter cook times, while thicker foods need low heat and longer cook times.
 - Vegetables take longer to cook than meats at the same cooking temperatures.
 - Always check that the internal temperature of the meat that you are cooking reaches a safe temperature for eating.
 - The Keep Warm function is not designed to properly cook your food.

6. Keep the grill clean. Regularly inspect your grill for accumulated grease. Most grease fires are caused by not properly maintaining the grill and failing to clean the Traeger® Grease Management System (TGMS) on a consistent basis (see "Maintaining Your Grill" on pages 22-23). Even if there is ample room in the grill, be cautious of loading excessive amounts of food that can release large quantities of flammable grease (for example more than a pound of bacon). If the grill has not been well maintained or if your previous cooks have produced large quantities of flammable grease, it is highly recommended that the grease be cleaned from the grill before using it again.

NOTE: Take care of your grill by using a new Traeger[®] drip tray liner before each cook to help keep your grill clean.

SERVICE



TRAEGER'S LEGENDARY CUSTOMER SERVICE is the best out there. If you have any questions about


your Traeger® Grill or need tips on cooking your first holiday turkey, our seasoned experts have your back. We're here for you 365 days a year, including holidays. For assistance with assembly, installation, safe operation, parts, or general customer service, you can visit our website **traeger.com/support** or you can phone or write us at:

TRAEGER'S CUSTOMER SERVICE

Please visit: traeger.com/support
Phone: US/CA: I-800-TRAEGER 6:00 a.m. - I0:00 p.m. MT

Address: TRAEGER PELLET GRILLS LLC 1215 E. Wilmington Ave., Suite 200 Salt Lake City, UT 84106


TRAEGER'S CUSTOMER SERVICE IS JUST A SCAN AWAY

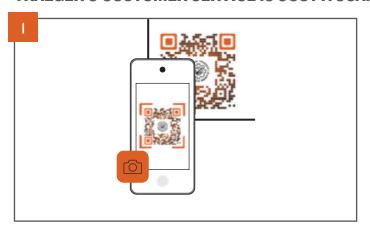

Open the camera on your phone and point it at the QR code.



Wait for the camera to register and tap the notification or banner when it appears on your screen.

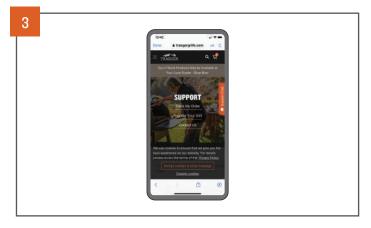

Information related to the code will automatically load.



TRAEGER® GRILL WARRANTY



7-YEAR LIMITED WARRANTY

Traeger Pellet Grills LLC warrants this Traeger® Grill for the components, coverage, and warranty period listed in the table below under normal use and proper maintenance. This warranty gives you specific legal rights, and you may also have other rights which may vary among states and provinces. The warranty period starts from the date of original purchase from traeger.com or a Traeger authorized dealer. A list of Traeger authorized dealers is available at https://www.traeger.com/dealers (together each an "Authorized Seller"). The warranty period and coverage for the replacement parts shall be as follows:

Warranty Periods and Coverage						
Components	Warranty Period	Coverage				
Body, Legs, Hopper Cover	7 Years	Will not rust through				
Grates	3 Years	Will not rust through				
Controller	3 Years	Material and Manufacturing Defects				
All Terrain Wheels	3 Years	Material and Manufacturing Defects				
Fan, Auger Motor	l Year	Material and Manufacturing Defects				
Hot Rod, Cord, RTD, Thermocouple	l Year	Material and Manufacturing Defects				
Heat Baffle, Drip Tray	l Year	Will not rust through				
Door Gasket	l Year	Will not tear or fray				
Meat Probe	l Year	Material and Manufacturing Defects				

Traeger's entire liability and your exclusive remedy shall be replacement of the defective parts of your Traeger® Grill, if any. Original part(s) approved for return by Traeger's Customer Service must be returned prepaid. Traeger may replace defective parts with new or refurbished parts, at Traeger's sole discretion on an as available basis within ninety days. Without limiting the exclusions stated above, there is not warranty coverage for: (i) paint damage caused by grease fires; (ii) UV exposure; (iii) normal wear and tear; and (iv) warping of the drip tray or heat baffle.

Traeger grills are designed to be modular for simple repair by regular users. Traeger's entire obligation under this warranty shall be to provide you with replacement of any defective parts and to provide you with instructions on how to make the replacement yourself. Traeger may replace defective parts with new or refurbished parts. Traeger reserves the right to inspect any grill (shipping paid by Traeger) and to analyze any usage information including, without limitation, any digital connected grill data (to the extent covered by our data protection policy). To validate and process a warranty claim Traeger may require that you provide reasonable evidence of your issue, including participating in video chats, phone conversations, providing photos, and providing other relevant information. Labor charges connected with the replacement of defective parts and freight charges to ship parts shall be paid at your expense.

The limitations in the following paragraph do not apply to residents of Quebec to whom the Quebec Consumer Protection Act applies.

FOR GREATER CERTAINTY AND TO FULLEST EXTENT PERMITTED BY LAW, TRAEGER PELLET GRILLS LLC SHALL NOT BE LIABLE UNDER THIS OR ANY IMPLIED WARRANTY FOR INCIDENTAL, CONSEQUENTIAL DAMAGES, INDIRECT OR SPECIAL LOSS OF DATA, EXEMPLARY, PUNITIVE OR ENHANCED DAMAGES, LOST PROFITS OR REVENUES, OR DIMINUTION IN VALUE ARISING OUT OF OR RELATING TO YOUR USE OF YOUR GRILL, REGARDLESS OF (A) WHETHER SUCH DAMAGES WERE FORESEEABLE, (B) WHETHER OR NOT TRAEGER WAS ADVISED OF THE POSSIBILITY OF SUCH DAMAGES, AND (C) THE LEGAL OR EQUITABLE THEORY (CONTRACT, TORT, OR OTHERWISE) UPON WHICH THE CLAIM IS BASED, AND NOTWITHSTANDING THE FAILURE OF ANY AGREED OR OTHER REMEDY OF ITS ESSENTIAL PURPOSE. THIS WARRANTY GIVES THE RETAIL CUSTOMER SPECIFIC LEGAL RIGHTS AND THE CUSTOMER MAY HAVE OTHER RIGHTS WHICH VARY FROM STATE/PROVINCE TO STATE/PROVINCE. BOTH YOU AND TRAEGER INTEND FOR THIS WARRANTY TO BE YOUR EXCLUSIVE REMEDY FOR A DEFECTIVE GRILL.

This warranty shall be void if: (i) the grill is not assembled or operated in accordance with Traeger's operating instructions provided with this grill; (ii) the grill is not purchased from an Authorized Seller; (iii) the grill is resold or traded to another owner; (iv) there has been use of any third party components, parts, or accessories; (v) fuels other than wood pellets designed for wood pellet grills and barbeques have been used with the grill; (vi) wood stove heating pellets are used in the grill; (vii) the grill has been used in a commercial or food service application; (viii) the user has allowed the grill to become damaged, abused, or otherwise failed to maintain the grill in accordance with Traeger's operating instructions; or (ix) there has been any unapproved modification of this grill.

Please note that because Traeger is unable to oversee or control the quality of its products sold by unauthorized sellers, Traeger's warranty is only available if you purchased your grill from an Authorized Seller. Traeger's warranty extends only to products purchased from an Authorized Seller.

To process a warranty claim, contact Traeger's customer service at the phone number or address listed above. Traeger requires proof of your date of purchase from an Authorized Seller. You should retain your sales slip or invoice along with this manual with your valuable documents.

Customers outside of the United States and Canada should note that NOT all warranty policies stated herein are consistent globally. Customers should contact the local distributor in their current country from the list at International Support for instructions regarding warranty claims specific to that country. The process described herein will not work for international warranty requests.

ADDITIONAL IMPORTANT WARRANTY INFORMATION

- We are not responsible for items lost in transit. For this reason, we highly recommend getting a tracking number or delivery confirmation when shipping your package.
- The product you send to us becomes the possession of Traeger and will not be returned to you.

Traeger will determine if your warranty claim is covered under this warranty policy at Traeger's sole and complete discretion, and failure to follow the required procedures may void your warranty claim. This warranty gives you specific legal rights, and you may also have other rights which vary from State/Province to State/Province or Country to Country.



27



WELCOME TO THE TRAEGERHOOD

FOLLOW US @TRAEGERGRILLS

Traeger Pellet Grills LLC 1215 E. Wilmington Ave., Suite 200 Salt Lake City, UT 84106